
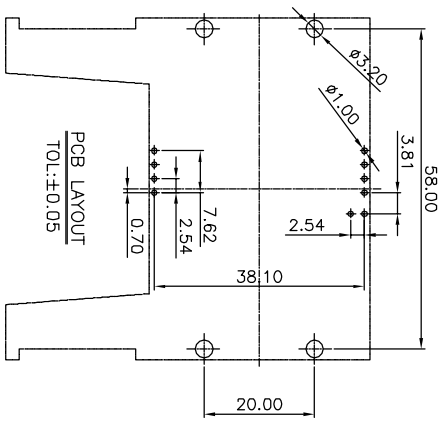
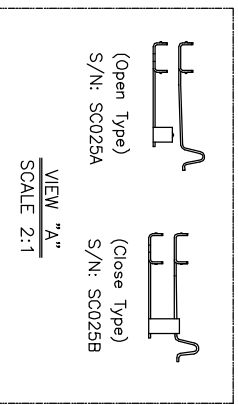
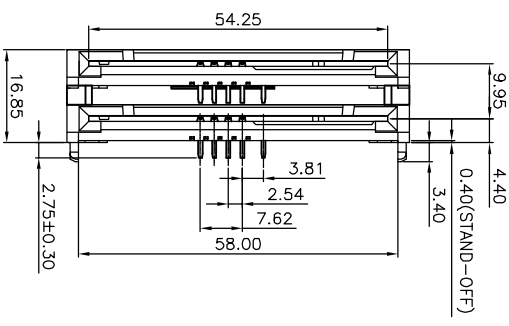


PERFORMANCE CHARACTERISTICS

Current Rating: 1 Amp Max.
 Contact Resistance: 100 mΩ Max.
 Insulation Resistance: 1000 MΩ Min.
 Dielectric Withstanding Voltage: 1000 VAC RMS.
 Operating Temperature: -40°C TO +60°C

MATERIAL

Insulator: Glass Reinforced PBT
 UL94V-0 Rated
 Insulator Color: Black (SC022)
 Contact: Phosphor Bronze
 Plating: Selective Gold

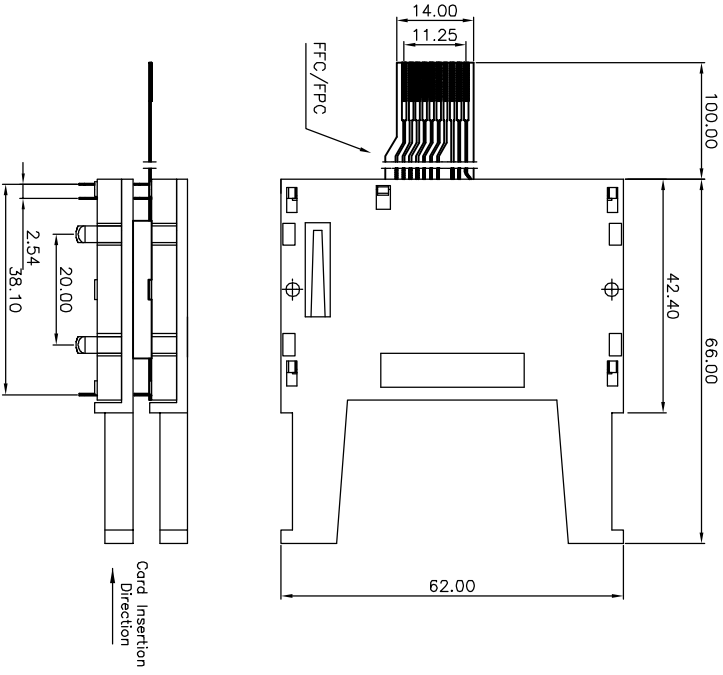

REV. ECN NO.	DESCRIPTION	DATE
DR.	CHK.	APP.
	INITIAL RELEASE	11/24/05

U/N/TS:MM	TOLERANCE (UNLESS SPECIFIED)
0.0	±0.35
0.00	±0.20
0.000	±0.10

2484-008-001-100

TITLE: **雙層 SMART CARD (SC025)**

DWG NO.	SERIES	SHEET
FILE PATH	SC025	1/1
PD\SC\SC025\MSC025-01		REV. A